1/6

FIG. 1


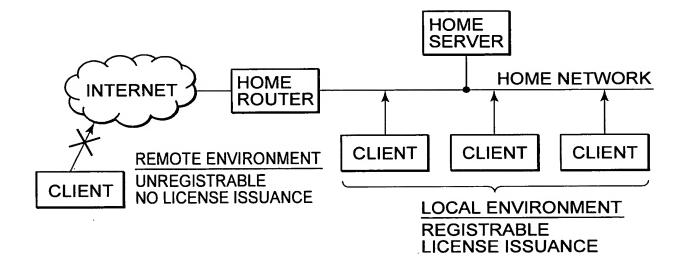


FIG. 2

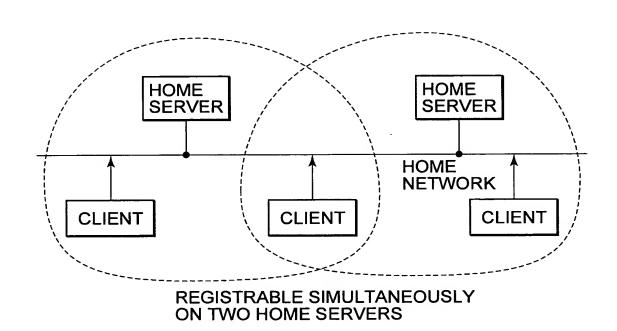

2/6

FIG. 3




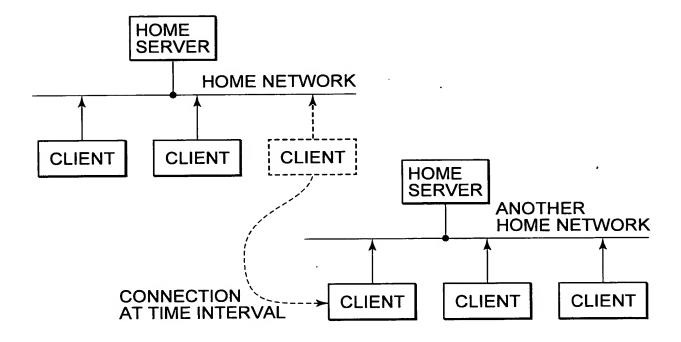


FIG. 4

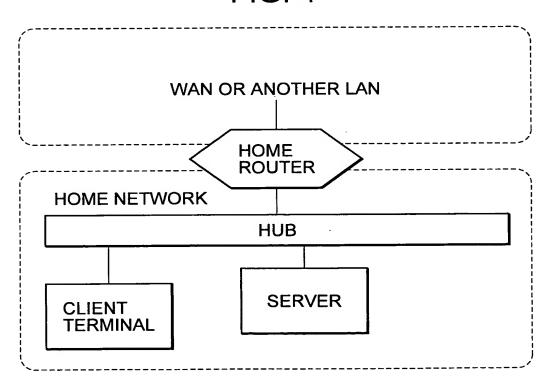

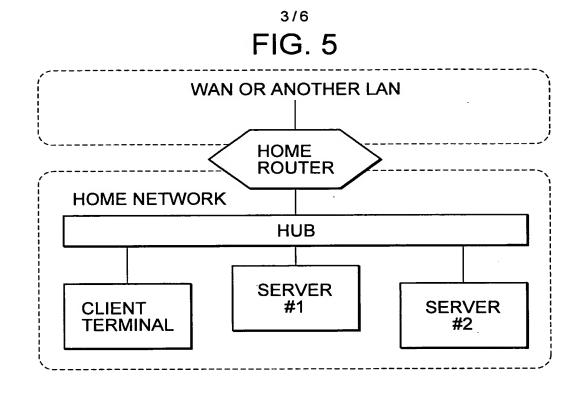

. . .

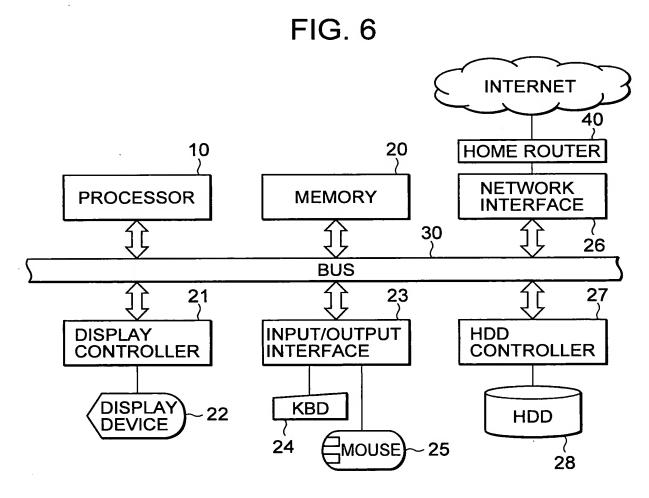

^{4/6} FIG. 7


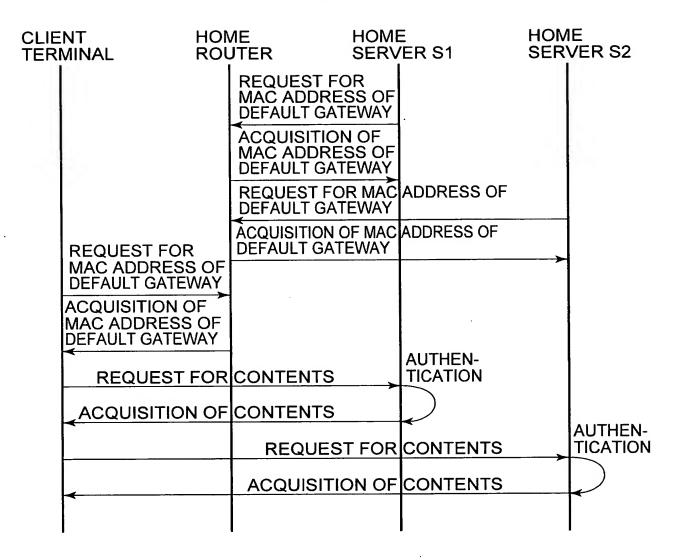


FIG. 8

NETWORK IDENTIFICATION ID	MAC ADDRESS OF SERVER	SERVER NAME
DEFAULT GATEWAY OF HOME ROUTER A	MAC ADDRESS OF SERVER S1	SERVER S1
DEFAULT GATEWAY OF HOME ROUTER A	MAC ADDRESS OF SERVER S2	SERVER S2
DEFAULT GATEWAY OF HOME ROUTER B	MAC ADDRESS OF SERVER S3	SERVER S3

5/6 FIG. 9 **START S1** ANY SERVERS HAVING NO THE SAME ID AS THAT OF THE LAST FLAG? **S**3 S2 YES THE CONTENTS RECEIVED THE CONTENTS RECEIVED FROM SERVER HAVING THE FROM SERVER HAVING SAME ID ARE RENDERED **DIFFERENT ID ARE** RENDERED UNAVAILABLE **AVAILABLE START**

FIG. 10

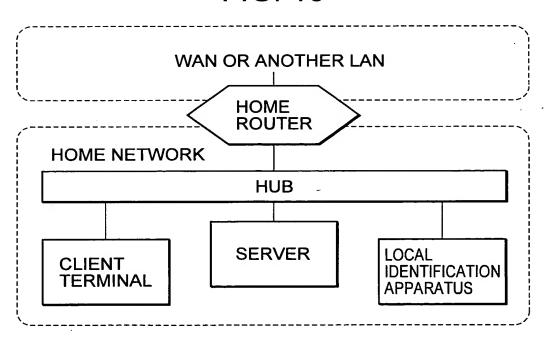

6/6

FIG. 11

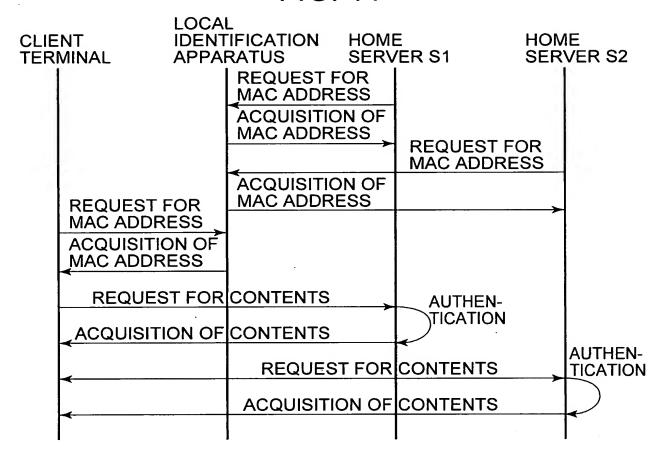


FIG. 12

